

Hunter®

SRS Spray Sprinklers



SRS

Economy and Versatility for Sprays: A Solution that's Compatible with all Standard Nozzles

For the many who have been asking for just such a product, Hunter is pleased to present the solution for sprays that offers brand name quality at an economical price. The SRS combines Hunter technology with the exceptional versatility that comes

from being compatible with virtually any standard female-threaded nozzle. You'll find the construction of the SRS is brawny and durable, highlighted by a rugged, flat body cap. The SRS — it's the ultimate in customer convenience from a name you can trust.

FEATURES & BENEFITS



- **NEW! Full-line of fixed arc and adjustable nozzles**
Provides maximum flexibility to accommodate virtually all types of watering needs
- **Compatible with all standard nozzles**
Accepts popular female-threaded nozzles from all major brands
- **UV-resistant wiper seal**
Assures long life at a wide range of water pressures
- **Standard side inlet**
Featured on 6" and 12" models for installation convenience
- **Adjustable pop-up stem position**
Ensures quick pattern alignment
- **Strong stainless steel spring**
Ensures reliable retraction year after year



Models

- SRS-00 – Shrub
- SRS-02 – 2" Pop-up
- SRS-03 – 3" Pop-up
- SRS-04 – 4" Pop-up
- SRS-06 – 6" Pop-up
- SRS-12 – 12" Pop-up

Dimensions

- Overall height:
SRS-02 – 4"
SRS-03 – 4 7/8"
SRS-04 – 6"
SRS-06 – 8 1/2"
SRS-12 – 15 1/4"
- 1/2" female inlet
- Exposed diameter: 2"

Operating Specifications

- Pressure range:
15 to 70 psi
- Radius: 7' to 19'
- Flow-by: 0 gpm at 10 psi or greater, .1 gpm at less than 10 psi
- Optional field-installed drain check valve for up to 7' elevation change
- Optional reclaimed water I.D. cap





Everything's Watered "Just Right"

Whether it's adjustable or fixed, every Hunter spray nozzle produces true matched precipitation across all popular arc and radius ranges. And when you adjust the radius reduction screw, it holds the new setting, unlike many others. Arc adjustments are easy, from the top.

Nozzle identification is easy, too, because each radius is color-coded. Count on the complete Hunter nozzle family for efficient, uniform, water-saving coverage at every residential and commercial site.



| Spray Nozzles | | Model 7 ft. fixed | Model 7 ft. adj. | Model 10 ft. | Model 12 ft. | Model 15 ft. | Model 17 ft. | | | | | |
|---------------|-----|--|--|---|---|---|--|---------|----------|----------|----------|----------|
| | | Fixed Arc (Q,H,F) Trajectory: 0° Brown ● | Adjustable (25° - 360°) Trajectory: 0° Brown ● | Adjustable (25° - 360°) or fixed arc (Q,H,F) Trajectory: 15° Red ● | Adjustable (25° - 360°) or fixed arc (Q,H,F) Trajectory: 28° Green ● | Adjustable (25° - 360°) or fixed arc (Q,H,F) Trajectory: 28° Black ● | Adjustable (25° - 360°) or fixed arc (Q) Trajectory: 28° Gray ● | | | | | |
| Arc | PSI | Radius Model ft. GPM | Radius Model ft. GPM | Radius Model ft. GPM | Radius Model ft. GPM | Radius Model ft. GPM | Radius Model ft. GPM | | | | | |
| 45° | 20 | 7Q | 7A | 10A | 12A | 15A | 17A | | | | | |
| | 25 | | | | | | | 6' 0.17 | 9' 0.17 | 11' 0.27 | 14' 0.39 | 16' 0.48 |
| | 30 | | | | | | | 7' 0.19 | 10' 0.19 | 12' 0.28 | 15' 0.44 | 17' 0.56 |
| | 35 | | | | | | | 7' 0.24 | 10' 0.24 | 13' 0.36 | 15' 0.46 | 18' 0.60 |
| | 40 | | | | | | | 8' 0.26 | 11' 0.26 | 13' 0.38 | 16' 0.52 | 18' 0.63 |
| 90° | 20 | 7Q | 7A | 10A or 10Q | 12A or 12Q | 15A or 15Q | 17A or 17Q | | | | | |
| | 25 | | | | | | | 6' 0.34 | 9' 0.34 | 11' 0.53 | 14' 0.77 | 16' 0.97 |
| | 30 | | | | | | | 7' 0.39 | 10' 0.39 | 12' 0.56 | 15' 0.88 | 17' 1.13 |
| | 35 | | | | | | | 7' 0.49 | 10' 0.49 | 12' 0.71 | 15' 0.93 | 17' 1.20 |
| | 40 | | | | | | | 8' 0.51 | 11' 0.51 | 13' 0.76 | 16' 1.03 | 18' 1.25 |
| 120° | 20 | 7A | 7A | 10A | 12A | 15A | 17A | | | | | |
| | 25 | | | | | | | 6' 0.45 | 9' 0.45 | 11' 0.71 | 14' 1.03 | 16' 1.29 |
| | 30 | | | | | | | 7' 0.52 | 10' 0.52 | 12' 0.75 | 15' 1.17 | 17' 1.50 |
| | 35 | | | | | | | 7' 0.65 | 10' 0.65 | 12' 0.95 | 15' 1.24 | 18' 1.61 |
| | 40 | | | | | | | 8' 0.68 | 11' 0.68 | 13' 1.02 | 16' 1.37 | 18' 1.67 |
| 180° | 20 | 7H | 7A | 10A or 10H | 12A or 12H | 15A or 15H | 17A | | | | | |
| | 25 | | | | | | | 6' 0.68 | 9' 0.68 | 11' 1.07 | 14' 1.54 | 16' 1.94 |
| | 30 | | | | | | | 7' 0.78 | 10' 0.78 | 12' 1.12 | 15' 1.75 | 17' 2.25 |
| | 35 | | | | | | | 7' 0.97 | 10' 0.97 | 12' 1.42 | 15' 1.86 | 17' 2.41 |
| | 40 | | | | | | | 8' 1.02 | 11' 1.02 | 13' 1.52 | 16' 2.06 | 18' 2.50 |
| 240° | 20 | 7A | 7A | 10A | 12A | 15A | 17A | | | | | |
| | 25 | | | | | | | 6' 0.91 | 9' 0.91 | 11' 1.42 | 14' 2.06 | 16' 2.58 |
| | 30 | | | | | | | 7' 1.04 | 10' 1.04 | 12' 1.50 | 15' 2.34 | 17' 3.00 |
| | 35 | | | | | | | 7' 1.30 | 10' 1.30 | 12' 1.90 | 15' 2.48 | 17' 3.21 |
| | 40 | | | | | | | 8' 1.36 | 11' 1.36 | 13' 2.03 | 16' 2.75 | 18' 3.34 |
| 270° | 20 | 7A | 7A | 10A | 12A | 15A | 17A | | | | | |
| | 25 | | | | | | | 6' 1.02 | 9' 1.02 | 11' 1.60 | 14' 2.31 | 16' 2.90 |
| | 30 | | | | | | | 7' 1.17 | 10' 1.17 | 12' 1.68 | 15' 2.63 | 17' 3.38 |
| | 35 | | | | | | | 7' 1.46 | 10' 1.46 | 13' 2.14 | 15' 2.79 | 18' 3.61 |
| | 40 | | | | | | | 8' 1.53 | 11' 1.53 | 13' 2.29 | 16' 3.09 | 18' 3.76 |
| 360° | 20 | 7F | 7A | 10A or 10F | 12A or 12F | 15A or 15F | 17A | | | | | |
| | 25 | | | | | | | 6' 1.36 | 9' 1.36 | 11' 2.13 | 14' 3.08 | 16' 3.87 |
| | 30 | | | | | | | 7' 1.56 | 10' 1.56 | 12' 2.24 | 15' 3.50 | 17' 4.50 |
| | 35 | | | | | | | 7' 1.95 | 10' 1.95 | 12' 2.85 | 15' 3.71 | 17' 4.82 |
| | 40 | | | | | | | 8' 2.04 | 11' 2.04 | 13' 3.05 | 16' 4.12 | 18' 5.01 |



| Strip Pattern Nozzles | | | | Color Code: Blue | | | |
|-------------------------------|------|----------|----------------------------|------------------|------|------|------------|
| Nozzle Model | PSI | GPM | Width (ft.) x Length (ft.) | Nozzle Model | PSI | GPM | Flow (GPM) |
| LCS-515 Left-Corner Strip | 20 | 0.55 | 4' x 14' | ST-16A | 20 | 15' | .40 |
| | 25 | 0.60 | 5' x 15' | | 25 | 16' | .46 |
| | 30 | 0.65 | 5' x 15' | | 30 | 16' | .50 |
| | 35 | 0.70 | 5' x 15' | | 35 | 17' | .54 |
| RCS-515 Right-Corner Strip | 40 | 0.75 | 5' x 15' | 40 | 18' | .57 | |
| | 20 | 0.55 | 4' x 14' | ST-16A | 20 | 15' | .67 |
| | 25 | 0.60 | 5' x 15' | | 25 | 16' | .80 |
| | 30 | 0.65 | 5' x 15' | | 30 | 16' | .88 |
| 35 | 0.70 | 5' x 15' | 35 | | 17' | .97 | |
| SS-530 Side-Strip | 40 | 0.75 | 5' x 15' | 40 | 18' | 1.04 | |
| | 20 | 1.10 | 4' x 28' | ST-16A | 20 | 15' | 1.19 |
| | 25 | 1.20 | 5' x 30' | | 25 | 16' | 1.46 |
| | 30 | 1.30 | 5' x 30' | | 30 | 16' | 1.66 |
| 35 | 1.40 | 5' x 30' | 35 | | 17' | 1.82 | |
| 40 | 1.50 | 5' x 30' | 40 | 18' | 1.99 | | |

| Stream Spray Nozzles | | | | Color Code: Blue | | | |
|----------------------|-----|------|------------|------------------|------|------|------------|
| Nozzle Model | PSI | GPM | Flow (GPM) | Nozzle Model | PSI | GPM | Flow (GPM) |
| 90° ST-16A | 20 | 15' | .40 | ST-16A | 20 | 15' | .67 |
| | 25 | 16' | .46 | | 25 | 16' | .80 |
| | 30 | 16' | .50 | | 30 | 16' | .88 |
| | 35 | 17' | .54 | | 35 | 17' | .97 |
| 180° ST-16A | 40 | 18' | .57 | 40 | 18' | 1.04 | |
| | 20 | 15' | 1.19 | ST-16A | 20 | 15' | 1.19 |
| | 25 | 16' | 1.46 | | 25 | 16' | 1.46 |
| | 30 | 16' | 1.66 | | 30 | 16' | 1.66 |
| 35 | 17' | 1.82 | 35 | | 17' | 1.82 | |
| 40 | 18' | 1.99 | 40 | 18' | 1.99 | | |


| PCN Bubbler Nozzle (flood pattern) | | | |
|------------------------------------|--------------|----------|----------|
| Model | Pressure PSI | Flow GPM | Flow GPM |
| 25 | 25 | 0.25 | 0.25 |
| 50 | 25 | 0.50 | 0.50 |
| 10 | 25 | 1.0 | 1.0 |
| 20 | 25 | 2.0 | 2.0 |

For Deep Watering...

The PCN pressure compensating nozzle gives all the precision of drip with no maintenance hassles. Meet the specific watering needs of plants with no excess runoff or waste.



PRODUCT EXPLANATION

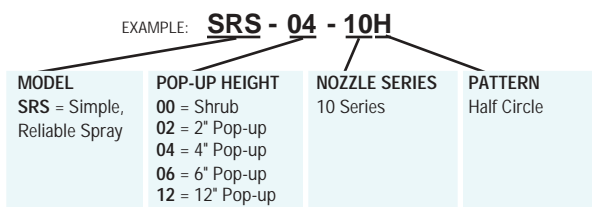

Note: Bodies and nozzles sold separately

Short Radius Nozzles

| Arc | PSI | Radius | GPM | PSI | Radius | GPM | PSI | Radius | GPM | | |
|------|-----|--------|-----|-----|--------|-----|-----|--------|-----|----|------|
| 45° | 20 | 2' | .09 | 2Q | 20 | 4' | .20 | 4Q | 20 | 6' | .47 |
| | 25 | 2' | .10 | | 25 | 4' | .22 | | 25 | 6' | .49 |
| | 30 | 2' | .11 | | 30 | 4' | .22 | | 30 | 6' | .51 |
| | 35 | 2' | .12 | | 35 | 4' | .24 | | 35 | 6' | .52 |
| 90° | 40 | 2' | .14 | 2H | 40 | 4' | .24 | 4H | 40 | 6' | .52 |
| | 20 | 2' | .12 | | 20 | 4' | .41 | | 20 | 6' | .95 |
| | 25 | 2' | .14 | | 25 | 4' | .43 | | 25 | 6' | .97 |
| | 30 | 2' | .16 | | 30 | 4' | .44 | | 30 | 6' | .98 |
| 180° | 35 | 2' | .18 | 2H | 35 | 4' | .46 | 4H | 35 | 6' | .99 |
| | 40 | 2' | .18 | | 40 | 4' | .46 | | 40 | 6' | 1.00 |